



# DREAMOC POP2 - FACTSHEET

## Product features

- 1 sided viewing
- Combine physical objects with holographic content
- Automatic and manually control spotlight
- Remote Up/Download of content via FTP
- Bright and sharp picture quality
- Easy change of content
- Key protected door
- Seven push button for easy operation
- Built-in loudspeakers
- HDMI input for interactivity
- Programmable on/off timer

## Specifications

- Power Consumption: 50W (Max) < 1W (Deep st.by.) < 5W (St.by.)
- Power input: 90~264 Vac, 50/60Hz
- Screen size: 23", 16:9
- Resolution: Full HD 1920 X 1080p
- Content: WMV, MP4, AVI, MPEG1/2/4, H.264, VC-1 are supported
- Sound out: 2 x 10W
- Spotlight: adjustable from 0 to 8W or automatic control by movie
- Input: 1 x HDMI , 1 x SD slot
- SD card: Minimum class 4 - maximum 32Gbyte
- Network: RJ45

## Package content



- Dreamoc POP2 (optic installed)
- SD card (with demo movie)
- Power adapter ( LITEON / Adapter 65W/19V / PA-1650-64 / Power DC Jack19V )
- Euro power cable 1,5 m
- Set with two keys for the Dreamoc POP2 (same code for all Dreamoc POP2 locks)
- Cleaning cloth



## Measurements

WxHxD: 548 x 385 x 420 mm

Weight: 15 kg

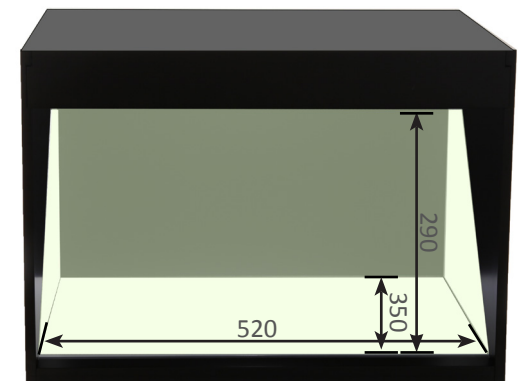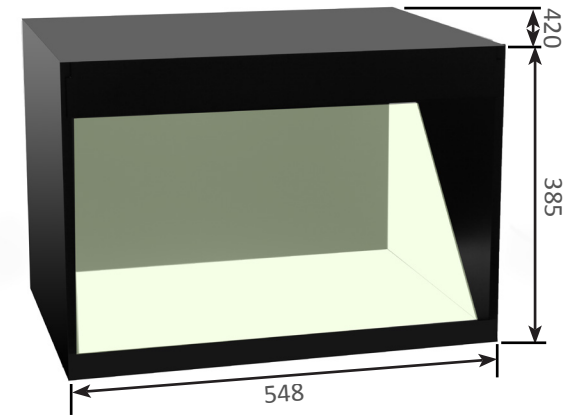

## Optional Accessories - The following items are not included

With the Dreamoc Play App your Dreamoc easily becomes an interactive selling or presentation tool. Browse and play Dreamoc content easily through a customizable interface. Available free on App Store.



SCAN THIS QR-CODE  
AND GET DREAMOC PLAY APP  
FOR FREE



For further information and pricing please  
contact Realfiction  
Phone: +45 70 20 64 90  
email: [contact@realfiction.com](mailto:contact@realfiction.com)

Realfiction and Dreamoc are registered trademarks owned by Realfiction ApS. Other marks may be mentioned here in that belong to other companies. © 2015 Realfiction ApS. All rights reserved.

Realfiction ApS | Øster Alle 42, 5th floor | DK-2100 Copenhagen Ø Denmark | Phone: +45 70 20 64 90